


Dynafllo 9GPM Series Pump Curves



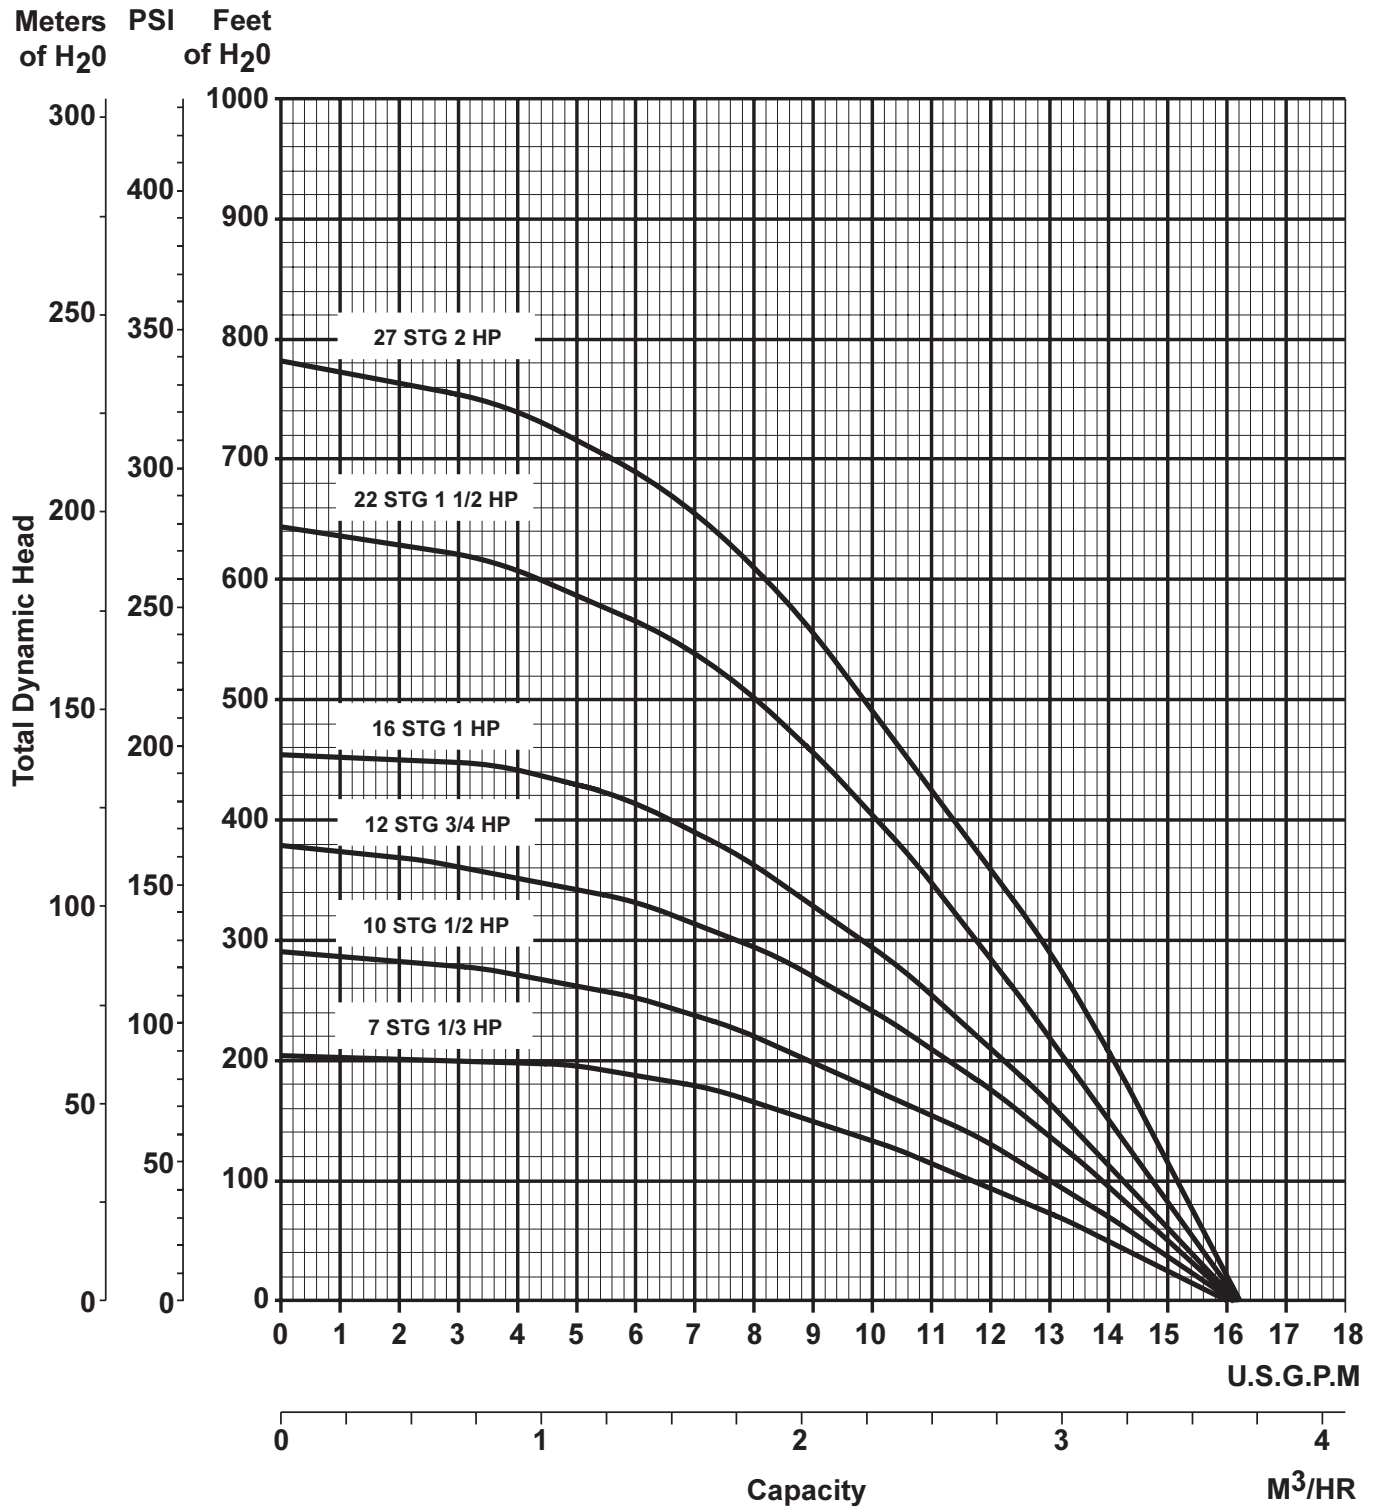

9 GPM - 1/3 - 2 H.P. Minimum Well Size 4" I.D. - 1" Discharge

Product No.	H.P.	Voltage Phase	3 Wire	Model	No. of Stages	Discharge Pressure Psi	Pumping Depth Feet										Shut Off Head Feet						
							20	40	60	80	100	120	140	160	180	200		240	280	320	360	400	
							Capacity in U.S. gallons per Hour																
40178	1/3	115/1	3	9DA3B	7	20	798	744	684	624	558	480	372										
40214		115/1		9DA3T		30	732	672	612	546	468	336											
40179		230/1		9DD3B		40	672	600	528	444	324												
40215		230/1		9DD3T		50	594	522	438	294													
40182		1/2		115/1		3	9DA5B	10	20	846	810	768	726	684	636	582	522	462	384				
40218	115/1		9DA5T	30	798		762		720	672	624	570	510	444	372	264							
40183	230/1		9DD5B	40	756		714		672	618	564	504	432	360	240								
40219	230/1		9DD5T	50	708		660		606	564	504	432	348	204									
40185	3/4		230/1	3	9DD7B		13		20	876	852	822	798	768	738	702	666	630	588	504	384	144	
40221		30			846	822		792	762	732	696	660	618	582	540	444	270						
		40			816	786		756	726	690	654	618	576	534	486	360							
		50			780	756		720	684	648	612	570	522	480	420	234							
		60			750	714		678	642	606	564	516	468	408	330								
40187	1	230/1	3	9DD10B	16	20	882	858	822	774	726	672	594	510	408	216							
40223				30		852	828	792	750	696	642	558	468	348									
				40		828	804	768	720	666	600	516	414	240									
				50		798	774	738	690	630	564	474	354										
				60		774	750	708	660	588	528	426	270										
40189	1 1/2	230/1	3	9DD15B	22	20	900	888	864	828	792	756	714	662	612	552	420						
Thermoplastic not available				30		882	870	840	810	774	738	690	642	588	528	372							
				40		864	846	822	786	750	714	666	618	558	498	312							
				50		846	828	804	768	732	696	642	588	528	468	216							
				60		828	810	780	750	708	666	618	564	504	432								
40190	2	230/1	3	9DD20B	27	20	924	912	894	864	840	810	774	732	690	648	552	438	228				
Thermoplastic not available				30		912	894	876	852	822	792	756	714	672	624	528	408						
				40		894	882	864	834	804	780	738	696	648	600	504	378						
				50		882	870	846	822	792	762	720	672	630	582	480	330						
				60		864	852	828	804	774	738	708	654	618	558	450	264						

B-Bronze T-Thermoplastic

Notes:

5, 9, 12, 18 & 25 GPM 2 Wire Models also available up to 1 HP on Thermoplastic and 1 1/2 HP Models on Bronze Pumps. The performance shown does not include friction losses in the drop pipe.